

Cisco IP Phone 79 Series

Connecting Your phone

Introduction

You may need to reconnect your phone for a variety of reasons; for example, your office location has moved. Your Cisco IP Phone works in conjunction with your computer and must be plugged into both a network port and your Towson owned computer. If there is no computer, plug the phone directly into a network data port. For guidance in connecting your phone, below is a diagram which describes the connectors on your Cisco Unified IP Phone.

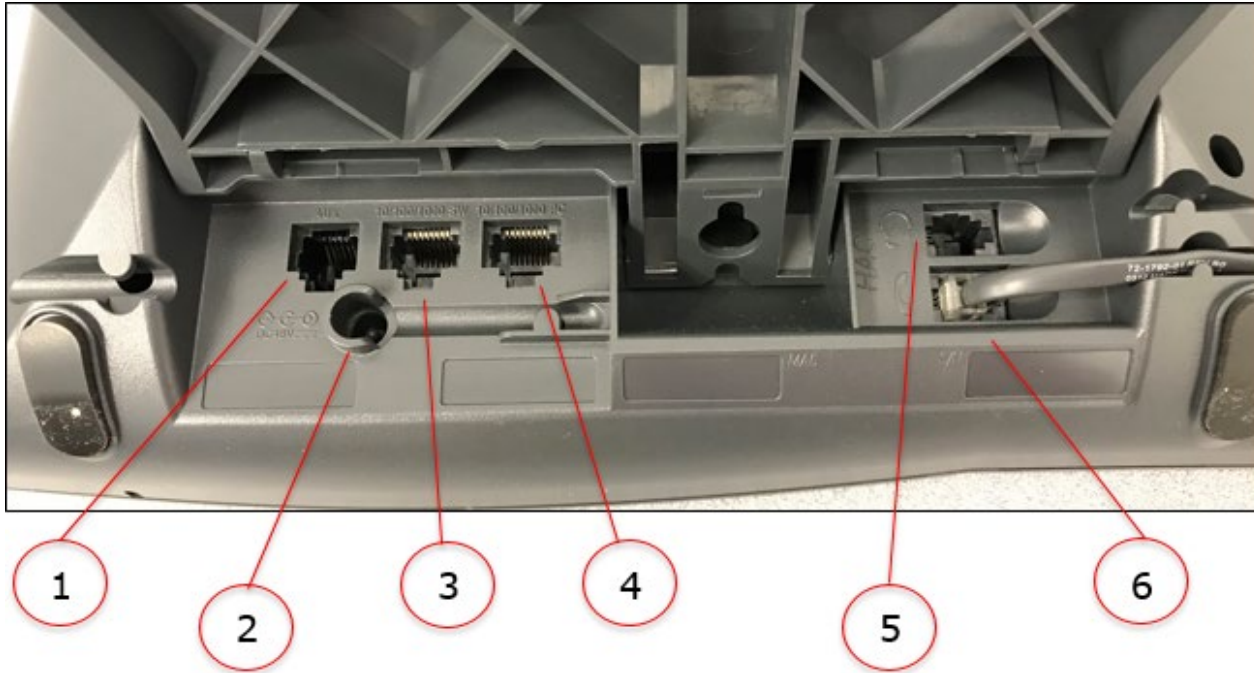


Figure 1

1	Auxiliary Port	(First connector from the left in back of phone) - Used for additional hardware accessories.
2	DC Adapter Port	(Below the auxiliary port in back of phone) - Not used at Towson.
3	Network port	(Second connector from the left in back of phone) - Connect network cord from wall jack here.
4	Access Port	(Third connector from the left in back of phone) - Connect network cord from computer here.
5	Handset Connection	(Fourth connector from the left in back of phone).
6	Analog Headset Connection	(Below the handset connection in back of phone) - Used to connect optional headset jack.